
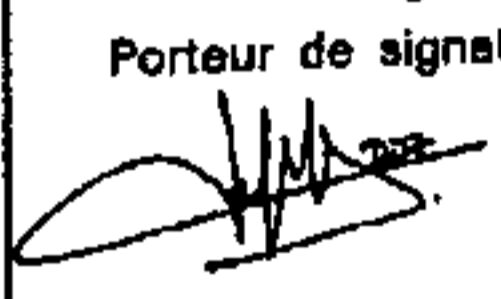



<p>Sales Agent: A 6- L-4008 Esch/Alzette</p> <p>Plant: L-4008 Esch/Alzette</p> <p>Our reference : 1700033160 Your reference : SSW131641 28.10.2022 SERVICE STEEL WAREHOUSE CO.</p> <p>ASTM A709 GRADE 50</p> <p>Manufacturer's test certificate acc. to ASTM A 6</p>	 ArcelorMittal Belval & Differdange Service Gestion Qualité 68, rue de Luxembourg L-4009 Esch/Alzette Mill Test Certificate Nr Q 4000137798 ArcelorMittal Internat. America, LLC 1 South Dearborn Street/13th Floor CHICAGO IL 60603 USA																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Ord. Item</th> <th>Product</th> <th>Length</th> <th>Weight</th> <th>Heat nr</th> <th>Weight</th> <th>Bund.</th> <th>Bars</th> </tr> </thead> <tbody> <tr> <td>000003</td> <td>W 8 X 8 X 31 W 200 X 200 X 46,1</td> <td>50' 15.240 mm</td> <td>21,075 mt</td> <td>43742</td> <td>21,075 mt</td> <td></td> <td>30</td> </tr> </tbody> </table>		Ord. Item	Product	Length	Weight	Heat nr	Weight	Bund.	Bars	000003	W 8 X 8 X 31 W 200 X 200 X 46,1	50' 15.240 mm	21,075 mt	43742	21,075 mt		30																										
Ord. Item	Product	Length	Weight	Heat nr	Weight	Bund.	Bars																																				
000003	W 8 X 8 X 31 W 200 X 200 X 46,1	50' 15.240 mm	21,075 mt	43742	21,075 mt		30																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Heat nr</th> <th colspan="8">Heat analysis (%)</th> </tr> <tr> <th>C</th> <th>Mn</th> <th>P</th> <th>S</th> <th>Si</th> <th>Nb</th> <th>B</th> <th>Mn/C</th> </tr> </thead> <tbody> <tr> <td rowspan="3">43742</td> <td>Min</td> <td></td> <td></td> <td></td> <td>0,10</td> <td>0,005</td> <td></td> <td>2,00</td> </tr> <tr> <td>Max</td> <td>0,23</td> <td>1,59</td> <td>0,040</td> <td>0,050</td> <td>0,40</td> <td>0,050</td> <td>0,0008</td> </tr> <tr> <td></td> <td>0,09</td> <td>0,91</td> <td>0,026</td> <td>0,021</td> <td>0,16</td> <td>0,024</td> <td>0,0003</td> </tr> </tbody> </table>		Heat nr	Heat analysis (%)								C	Mn	P	S	Si	Nb	B	Mn/C	43742	Min				0,10	0,005		2,00	Max	0,23	1,59	0,040	0,050	0,40	0,050	0,0008		0,09	0,91	0,026	0,021	0,16	0,024	0,0003
Heat nr	Heat analysis (%)																																										
	C	Mn	P	S	Si	Nb	B	Mn/C																																			
43742	Min				0,10	0,005		2,00																																			
	Max	0,23	1,59	0,040	0,050	0,40	0,050	0,0008																																			
		0,09	0,91	0,026	0,021	0,16	0,024	0,0003																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="3">Heat nr</th> <th colspan="3">Tensile test</th> </tr> <tr> <th>PSI</th> <th>PSI 200 mm</th> <th>UTS El. (%)</th> </tr> <tr> <th>Ys</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td rowspan="2">43742</td> <td>Min</td> <td>50.000</td> <td>65.000</td> </tr> <tr> <td>Max</td> <td>58.000</td> <td>73.950</td> </tr> <tr> <td>43742</td> <td></td> <td>57.420</td> <td>73.225</td> </tr> </tbody> </table>		Heat nr	Tensile test			PSI	PSI 200 mm	UTS El. (%)	Ys			43742	Min	50.000	65.000	Max	58.000	73.950	43742		57.420	73.225																					
Heat nr	Tensile test																																										
	PSI		PSI 200 mm	UTS El. (%)																																							
	Ys																																										
43742	Min	50.000	65.000																																								
	Max	58.000	73.950																																								
43742		57.420	73.225																																								
<p>Material melted and manufactured in LUXEMBOURG Killed Steel</p>																																											
<p>Dal Magro Damien Porteur de signature spéciale</p> 																																											

<p>Sales Agent: Luxembourg L-4221 ESCH-SUR-ALZETTE</p>	<p style="text-align: right;"> ArcelorMittal Belval & Differdange Service Gestion Qualité 66, rue de Luxembourg L-4009 Esch/Alzette</p>																																																																																			
<p>Plant: Site de Belval L-4008 Esch/Alzette</p>	<p style="text-align: center;">Mill Test Certificate Nr X 4737813 Delivery note number 4737813 from 17 November 2022</p>																																																																																			
<p>Our reference : 1700033160 Your reference : SSW131641 28.10.2022 SERVICE STEEL WAREHOUSE CO.</p>	<p style="text-align: center;">ArcelorMittal Internat. America, LLC 1 South Dearborn Street/13th Floor CHICAGO IL 60603 USA</p>																																																																																			
<p>ASTM A992 - ASTM A572 GR50 FINE GRAIN SILICON KILLED</p>																																																																																				
<p>Manufacturer's test certificate acc. to ASTM A 5</p>																																																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Ord. Item</th> <th>Product</th> <th>Length</th> <th>Weight</th> <th>Heat nr</th> <th>Weight</th> <th>Bund.</th> <th>Bars</th> </tr> </thead> <tbody> <tr> <td>000003</td> <td>W 8 X 8 X 31 W 200 X 200 X 46,1</td> <td>50' 15.240 mm</td> <td>21,075 mt</td> <td>43742</td> <td>21,075 mt</td> <td></td> <td>30</td> </tr> </tbody> </table>		Ord. Item	Product	Length	Weight	Heat nr	Weight	Bund.	Bars	000003	W 8 X 8 X 31 W 200 X 200 X 46,1	50' 15.240 mm	21,075 mt	43742	21,075 mt		30																																																																			
Ord. Item	Product	Length	Weight	Heat nr	Weight	Bund.	Bars																																																																													
000003	W 8 X 8 X 31 W 200 X 200 X 46,1	50' 15.240 mm	21,075 mt	43742	21,075 mt		30																																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Heat nr</th> <th colspan="13">Heat analysis (%)</th> </tr> <tr> <th>C</th> <th>Mn</th> <th>P</th> <th>S</th> <th>Si</th> <th>N</th> <th>Cu</th> <th>Ni</th> <th>Cr</th> <th>V</th> <th>Nb</th> <th>Mo</th> <th>Ti</th> <th>B</th> <th>CEV</th> <th>Sn</th> <th>Nb+V</th> </tr> </thead> <tbody> <tr> <td rowspan="3">43742</td> <td>Min</td> <td>0,50</td> <td></td> <td></td> <td>0,10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0,0008</td> <td>0,45</td> <td>0,150</td> </tr> <tr> <td>Max</td> <td>0,23</td> <td>1,60</td> <td>0,035</td> <td>0,045</td> <td>0,40</td> <td></td> <td>0,60</td> <td>0,45</td> <td>0,35</td> <td>0,150</td> <td>0,050</td> <td>0,150</td> <td></td> <td>0,0003</td> <td>0,32</td> <td>0,029</td> </tr> <tr> <td></td> <td>0,09</td> <td>0,91</td> <td>0,026</td> <td>0,021</td> <td>0,16</td> <td>0,009</td> <td>0,49</td> <td>0,18</td> <td>0,13</td> <td>0,005</td> <td>0,024</td> <td>0,040</td> <td>0,002</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Heat nr	Heat analysis (%)													C	Mn	P	S	Si	N	Cu	Ni	Cr	V	Nb	Mo	Ti	B	CEV	Sn	Nb+V	43742	Min	0,50			0,10										0,0008	0,45	0,150	Max	0,23	1,60	0,035	0,045	0,40		0,60	0,45	0,35	0,150	0,050	0,150		0,0003	0,32	0,029		0,09	0,91	0,026	0,021	0,16	0,009	0,49	0,18	0,13	0,005	0,024	0,040	0,002			
Heat nr	Heat analysis (%)																																																																																			
	C	Mn	P	S	Si	N	Cu	Ni	Cr	V	Nb	Mo	Ti	B	CEV	Sn	Nb+V																																																																			
43742	Min	0,50			0,10										0,0008	0,45	0,150																																																																			
	Max	0,23	1,60	0,035	0,045	0,40		0,60	0,45	0,35	0,150	0,050	0,150		0,0003	0,32	0,029																																																																			
		0,09	0,91	0,026	0,021	0,16	0,009	0,49	0,18	0,13	0,005	0,024	0,040	0,002																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Heat nr</th> <th colspan="4">Tensile test</th> </tr> <tr> <th>PSI</th> <th>PSI 200 mm</th> <th>UTS El. (%)</th> <th>Y/T</th> </tr> </thead> <tbody> <tr> <td rowspan="2">43742</td> <td>Min</td> <td>50.000</td> <td>65.000</td> <td>18,00</td> <td></td> </tr> <tr> <td>Max</td> <td>65.000</td> <td></td> <td></td> <td>0,85</td> </tr> <tr> <td>43742</td> <td>58.000</td> <td>73.950</td> <td>24,10</td> <td>0,78</td> <td></td> </tr> <tr> <td>43742</td> <td>57.420</td> <td>73.225</td> <td>23,86</td> <td>0,78</td> <td></td> </tr> </tbody> </table>		Heat nr	Tensile test				PSI	PSI 200 mm	UTS El. (%)	Y/T	43742	Min	50.000	65.000	18,00		Max	65.000			0,85	43742	58.000	73.950	24,10	0,78		43742	57.420	73.225	23,86	0,78																																																				
Heat nr	Tensile test																																																																																			
	PSI	PSI 200 mm	UTS El. (%)	Y/T																																																																																
43742	Min	50.000	65.000	18,00																																																																																
	Max	65.000			0,85																																																																															
43742	58.000	73.950	24,10	0,78																																																																																
43742	57.420	73.225	23,86	0,78																																																																																
<p>Material melted and manufactured in LUXEMBOURG Killed Steel</p>																																																																																				
<p>Dal Magro Damien Porteur de signature spéciale</p> 